



K 200

CLASSIC · EXTRA

SELF-PRIMING PUMPS 



Ergonomic handle for easy maneuverability

Maniglia ergonomica per una pratica movimentazione



ON CLASSIC VERSIONS

Without hose reel at the top

SU VERSIONI CLASSIC


Dotazione senza avvolgitubo nella parte superiore



MTP GXR · AXR

Motorpump with brass head and stainless steel pistons (GXR) or ceramic pistons (AXR) with valve and pressure gauge

Motopompa con testata in ottone e pistoni in acciaio inox (GXR) o in ceramica (AXR) con valvola e manometro

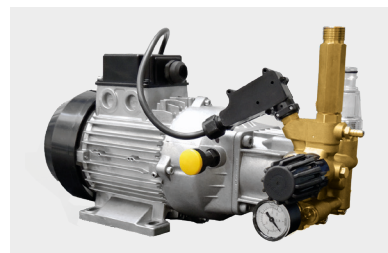


Removable detergent tank with externally visible level

Serbatoio detergente estraibile con livello visibile esternamente



Can be used vertically or horizontally

Utilizzabile in verticale o in orizzontale



FOR MORE INFO:
MAGGIORI INFORMAZIONI:



GENERAL FEATURES · CARATTERISTICHE GENERALI

- Sturdy injection-moulded plastic casing
- Handy lance and gun storage
- Handle with supports for the power cable and delivery hose
- Easy maintenance by simply removing the front casing
- Big wheels (220 mm Ø) for easy movement up and down steps and over uneven ground
- Removable detergent tank with level visible from the outside
- Regulated low-pressure detergent suction with filter
- GXR motorpump with brass head and stainless steel pistons (monophase models); AXR motorpump with brass head and ceramic pistons (three-phase models)
- 2-pole motor (2800 rpm)
- Built-in professional unloader valve + pressure gauge
- Total Stop system
- **Self-priming** pumps with EASY START device
- Rotary switch
- Motor thermal protection
- Robuste carenature in materiale plastico stampato ad iniezione
- Pratico alloggiamento della pistola e della lancia
- Manico con supporti di cavo alimentazione e tubo mandata
- Facilità di manutenzione con la semplice rimozione della carenatura frontale
- Ruote di grandi dimensioni (Ø 220 mm) per una facile movimentazione su gradini e terreni accidentati
- Serbatoio detergente estraibile con livello visibile esternamente
- Aspirazione detergente in bassa pressione con regolazione e filtro
- Motopompa GXR con testata in ottone e pistoni in acciaio inox; motopompa AXR con testata in ottone e pistoni in ceramica (modelli trifase)
- Motore a 2 poli (2800 giri/min)
- Valvola di regolazione professionale integrata + manometro
- Dispositivo Total Stop
- Pompa **autoadescante** con dispositivo EASY START
- Interruttore rotativo
- Protezione termica motore
- Uso semiprofessionale gravoso

TECHNICAL FEATURES · CARATTERISTICHE TECNICHE

CODE CODICE	MODELS MODELLI	PUMP POMPA	Ph V Hz			bar MPa		bar MPa		l/h		HP kW		kW	lt	kg	(L x W x H) cm
			MAX	WORK	WORK	WORK	WORK	WORK									
9057 0500	K 200 10/150 M Classic	GXR	1	230	50	150	15	30÷135	3÷13,5	280 ÷ 600	3,0	2,2	2,9	3,5	37	54 x 44 x 68	
9057 0501	K 200 10/150 M Extra	GXR	1	230	50	150	15	30÷135	3÷13,5	280 ÷ 600	3,0	2,2	2,9	3,5	47	54 x 44 x 99	
9057 0504	K 200 12/130 M Classic	GXR	1	230	50	130	13	30÷115	3÷11,5	360 ÷ 720	3,0	2,2	2,9	3,5	37	54 x 44 x 68	
9057 0505	K 200 12/130 M Extra	GXR	1	230	50	130	13	30÷115	3÷11,5	360 ÷ 720	3,0	2,2	2,9	3,5	47	54 x 44 x 99	
9057 0506	K 200 12/200 T Classic	AXR	3	400	50	200	20	30÷190	3÷19	290 ÷ 720	5,0	3,7	4,3	3,5	40	54 x 44 x 68	
9057 0507	K 200 12/200 T Extra	AXR	3	400	50	200	20	30÷190	3÷19	290 ÷ 720	5,0	3,7	4,3	3,5	50	54 x 44 x 99	

STANDARD EQUIPMENT · DOTAZIONE STANDARD

GC 201 gun with protection <i>Pistola GC 201 con protezione</i>	Bent lance, with adjustable nozzle <i>Kit lancia angolata, con ugello regolabile</i>	GC 251 gun with protection <i>Pistola GC 251 con protezione</i>	Bent lance with detergent head, with nozzle <i>Lancia angolata con testina detergente, con ugello</i>
EXTRA	CLASSIC	EXTRA	CLASSIC EXTRA
Bent lance, with rotating nozzle <i>Lancia angolata, con ugello rotante</i>	10 m rubber delivery hose kit <i>Kit tubo gomma mandata 10 m</i>	Hose Reel with 15 m rubber delivery hose <i>Avvolgitubo con tubo mandata 15 m</i>	Plastic inlet water filter <i>Filtro ingresso acqua in plastica</i>